





18

FIG. 1

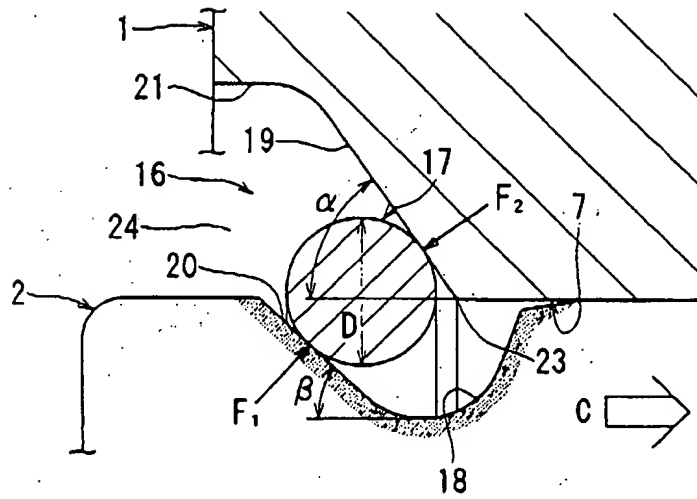



Inventors: YAMAMOTO et al.
U.S. Serial No. 09/814,183

FIG. 2

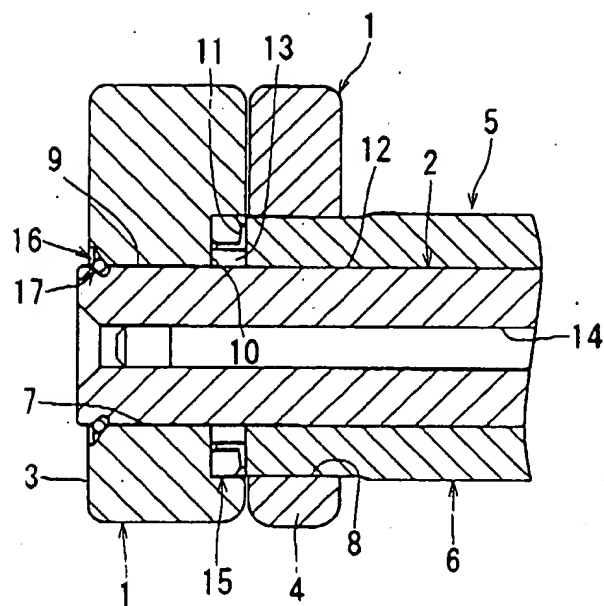




FIG. 3

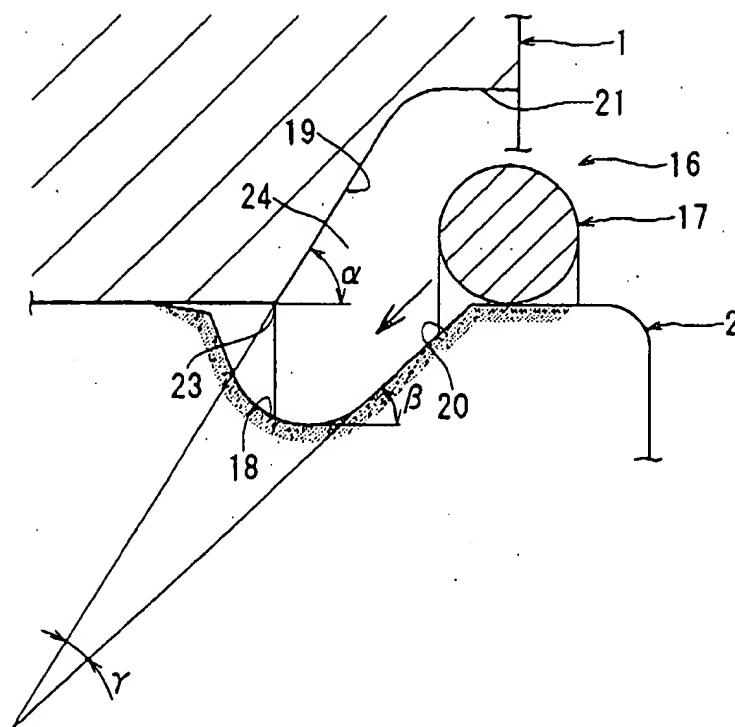




FIG. 5



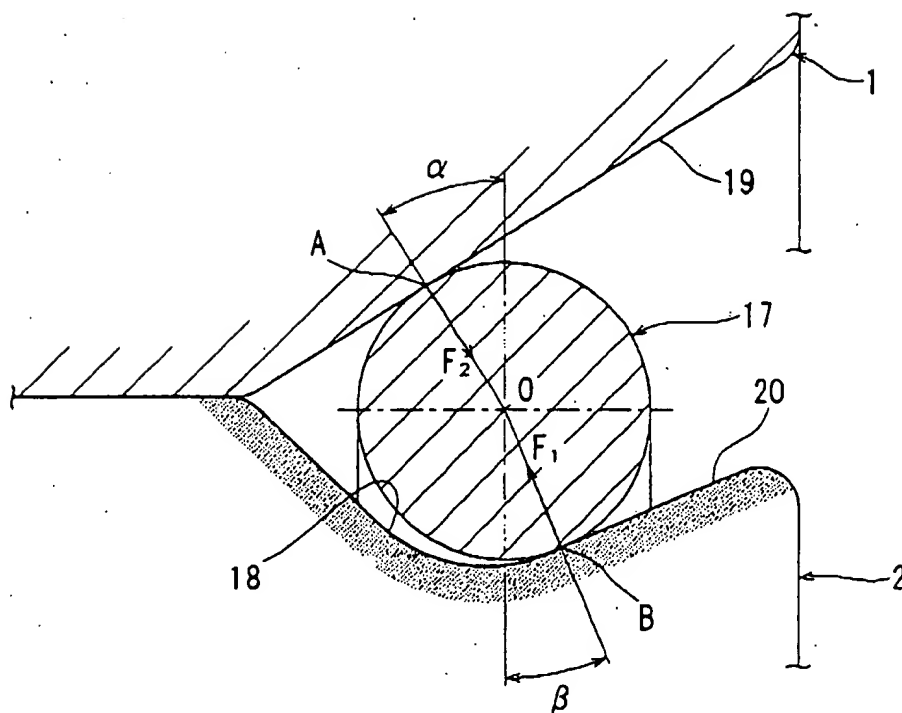





FIG. 6

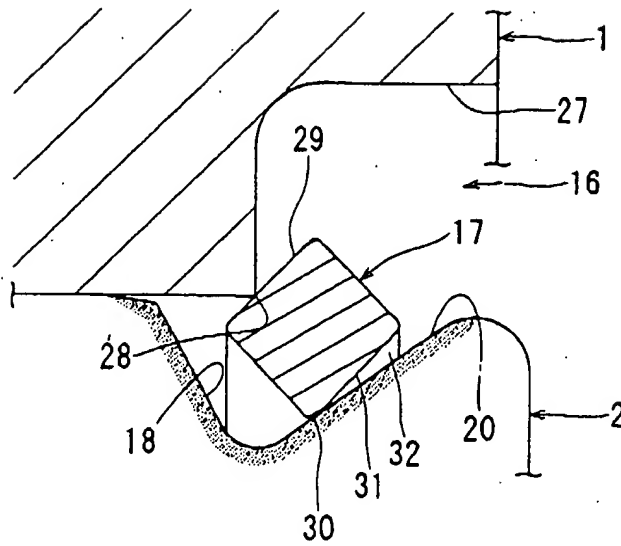



Inventors: YAMAMOTO et al.
U.S. Serial No. 09/814,183


FIG. 7

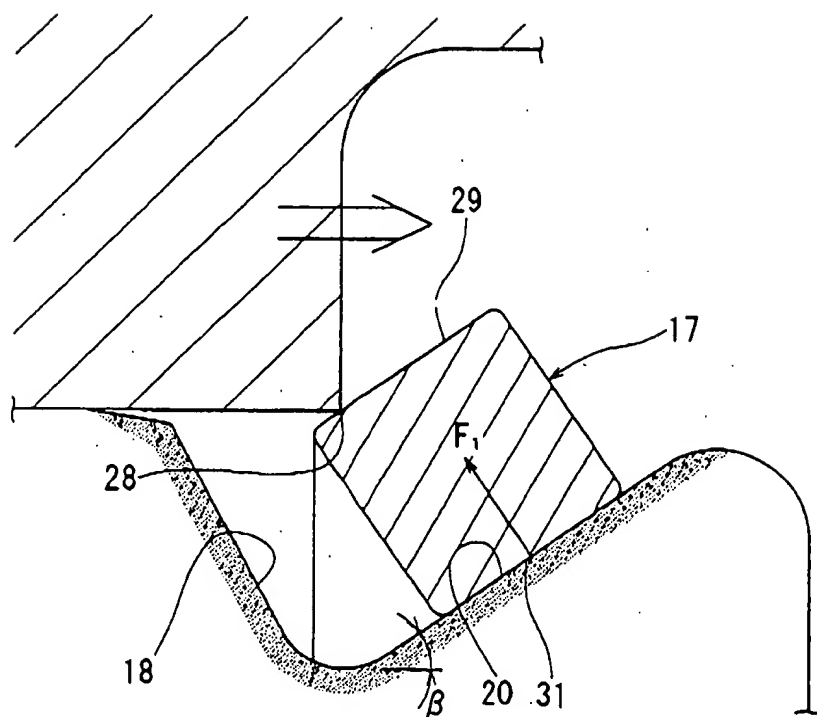




Inventors: YAMAMOTO et al.
U.S. Serial No. 09/814,183


FIG. 8

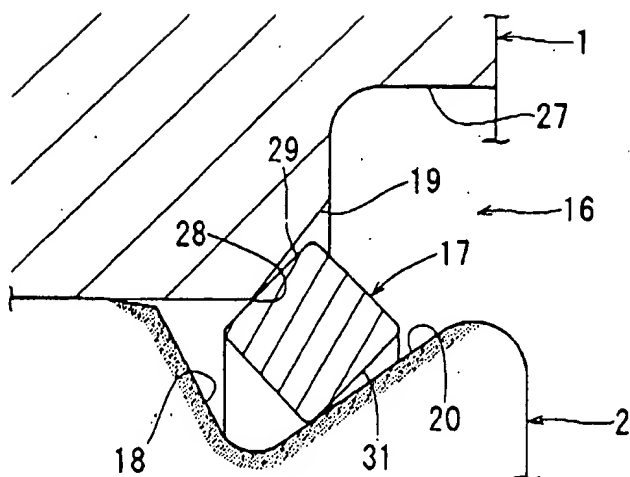



Inventors: YAMAMOTO et al.
U.S. Serial No. 09/814,183

FIG. 9

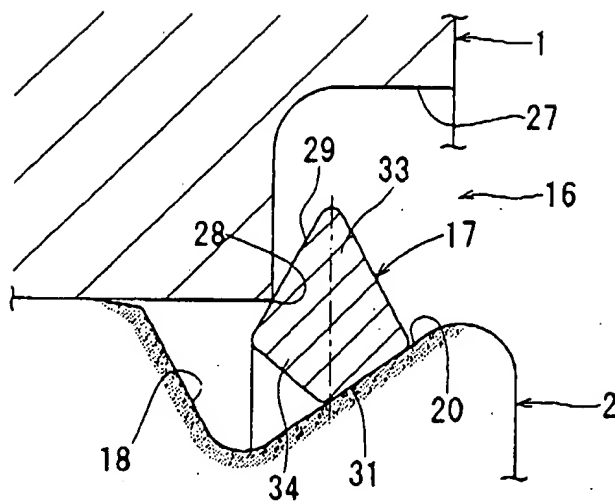


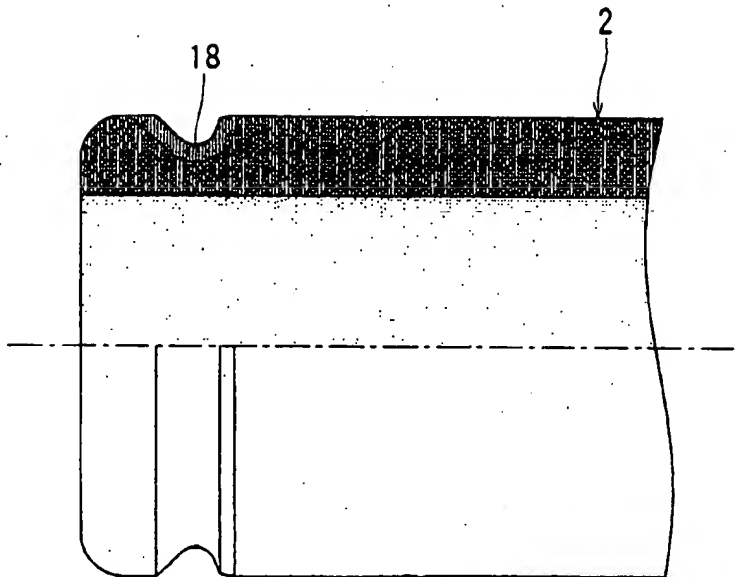


FIG. 11






Figure 1 is a schematic diagram of a mechanical assembly, shown in three views: a top view and two side views (left and right). The top view shows a central component 54 with a central shaft 61 and end flanges 60. The left and right views show the assembly mounted on a vertical support 55. The support has a central section 59 and end sections 52a and 52b. The assembly includes a bracket 56, a pin 58, and a nut 65. A dashed line L indicates the longitudinal axis.



Inventors: YAMAMOTO et al.
U.S. Serial No. 09/814,183

FIG. 13
PRIOR ART

